




# ZC80

## 技术参数 Technical info

- 1 力量级别/Power size :  
EN5/EN6
- 2 关门力 (N,m)0°-4°/Closer for (N,m)0°-4° :  
37-54/54-87
- 3 最大门宽/Width of door max :  
1250/1400mm
- 4 最大门重/Weight of door max :  
100/120kg
- 5 最大开启角度/Max Open Degree :  
180°
- 6 产品重量/Weight of body :  
8.00kg
- 7 使用寿命/Passed durability test :  
500,000次/500,000 cycles
- 8 铁壳尺寸/Dimension of cement box :  
341X78X60mm

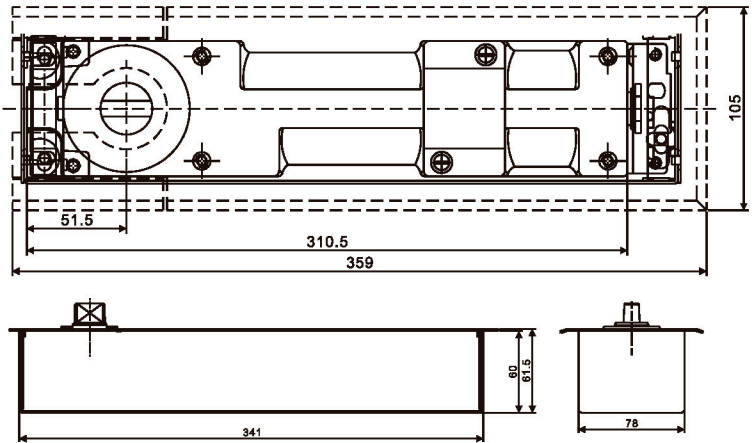

### 功能及优点:

- 内置减压阀, 防止因外来强压或强风状态闭门而造成地弹簧损坏或漏油。
- 180°至15°及180°至0°两个闭门速度调控阀, 以配合不同闭门效果。
- 除90°定位功能之外, 140°-180°随意定位可供选择。
- 通用型设计, 适合左右手及单双向开启门扇, 各使用方式均备有完整配件。
- 承重力达300kg, 最大门宽1400mm, 适合各类门扇。

### Features and advantages:

- Safety valve design, protect body not damage by outside forces or strong winds.
- 180°-15°, 180°-0° two speeds control make door close smoothly.
- Random hold open from 140°-180° optional hold-open 90° or non-holdopen.
- Suitable for all kind of door, single action and double open also available.
- Max door weight 300kg, Max door width 1400mm.


### 地弹簧与玻璃门夹的应用

#### ● 适用范围

- 12mm厚钢化玻璃
- 门重≤300kg
- 门宽≤1400mm
- 轴心点距边55mm或65mm可选

#### ● 饰面范围

- 标准拉丝不锈钢
- 可选镜面不锈钢



#### ◆ Dual valves speed adjustment. (双速调速)

- Speed 1 from 180° to 15° (1速为180°-15°)
- Speed 2 from 15° to 0° (2速为15°-0°)

#### ◆ Maximum opening angle : 180° (最大开启角度为180°)

#### ◆ Easy installation : (简单安装)

- German standard size. (参照德国标准尺寸)
- Suitable for left and right hand opening doors. (适用于左、右手开门)